



DEEP ROOF LIGHTING INC.
55 Sea Cliff Avenue, Glen Cove, NY 11542
P.O. Box 520191, Flushing, NY 11352
Tel: 516-676-9100, 9101, 9103, 9105, 9106
Fax: 516-676-9109
 Web Site: www.deeprooflighting.com
 Email: deeproof@aol.com jay@deeprooflighting.com


LED Corn Bulb 30 - 150 W L-series **UL DLC**




LED driver and thermal management. High-performance illumination that lasts 50,000HRS. It's ideal for replacing 60-400W Metal Halide, with typical energy savings of 80%.

LED Chips	Philip SMD3030							
Input power	30W	40W	60W	80W	100W	120W	150W	
Lumens output	Clear	3300-3450LM	4400-4600LM	6600-6900LM	9200-9600LM	11500-12000LM	13800-14400LM	17250-18000LM
	Frosted	3000-3300LM	4000-4400LM	6000-6600LM	8400-9200LM	10500-11500LM	12600-13800LM	15750-17250LM
Efficiency	Clear: 110-115LM/W			Clear: 115-120LM/W				
	Frosted: 100-110LM/W			Frosted: 105-115LM/W				
CRI	>80Ra							
Color Temperature	3000/4000/5000K							
Input voltage	100-277V UL Driver							
Lighting beam Angle	360D							
Waterproof Rating	IP 64							
Working temperature	-30~+80°C							
Junction temperature	<75°C							
lamps efficiency	≥90%							
Based	E26/E39							
Certificates	UL,CUL,DLC							
Equivalent	60-100W MH/HPS	80-150W MH/HPS	120-175W MH/HPS	150-250W MH/HPS	200-250W MH/HPS	200-400W MH/HPS	300-400W MH/HPS	

Photometrics

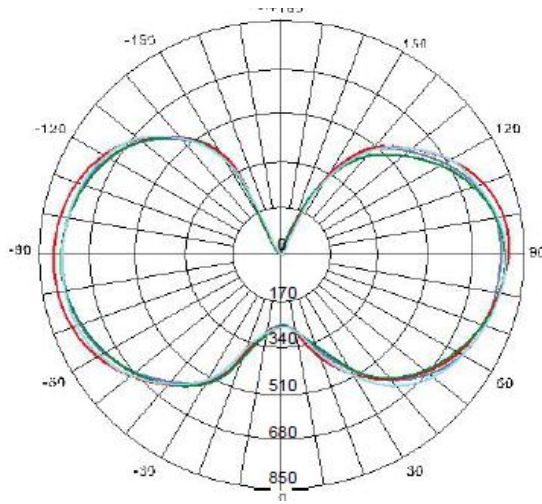

Dimensions:

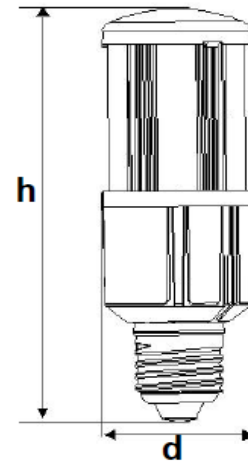

Power Based	30W	40W	60W	80W	100W	120W	150W
E26	φ93*210	φ93*240	φ93*265				
E39	φ93*230	φ93*260	φ93*285	φ125*270	φ125*290	φ125*310	φ125*335

ITEM CODES

LCB-L30-A(30/40/50)-(E26/E39)

30W, 3000/4000/5000K, E26/27 or E39/40 base

LCB-L60-A(30/40/50)-(E26/E39)

60W, 3000/4000/5000K, E26/27 or E39/40 base

LCB-L80-A(30/40/50)-E39

80W, 3000/4000/5000K, E39/40 base

LCB-L100-A(30/40/50)-E39

100W, 3000/4000/5000K, E39/40 base

LCB-L120-A(30/40/50)-E39

120W, 3000/4000/5000K, E39/40 base

LCB-L150-A(30/40/50)-E39

150W, 3000/4000/5000K, E39/40 base

Widely used in supermarket, warehouse, garage, home, office, hotel, hospital, school, street, garden etc.



