



RECESS 6" LINE VOLTAGE HOUSING SYSTEM



DN-06
New Construction Line Voltage
Non-IC Housing
Socket E27
Lamp: PAR30/R30
PAR38/R40 150W



DN-06 ICAT , DN-06 IC
New Construction Line Voltage
(Air Tight) IC Housing
Socket E27
Lamp: PAR30/R30 75W



Description:

1. For Insulation ceilings or where, insulating can be kept 3" from housing (U.S. only)
2. DN-06 ICAT housing is gasketed to prevent air flow from heated or air conditioned spaces.
3. DN-06 ICAT meet State of Washington Restricted Air Flow requirements.
4. IC Housing without socket plate for use with socket supporting trims only DNT-62K, DNT-63K, DNT-68, DNT-659, DNT-681, DNT-658. Eliminates time and labor cost of removing socket and socket plate.

Housing Features:

1. Integral thermal protector guards against misuse of insulation materials and improper lamping.
2. Adjustable socket bracket allows the use of different lamp types and sizes as well as proper and consistent lamp positioning.
3. Junction Box is listed for through branch circuit wiring and has three 1/2" knockouts and four Romex knockouts with true pryout slots. Romex knockouts include built in strain relief and require no additional clamps.
4. Plaster frame includes locking screw for hanger bars and cutouts for crimping hanger bars in position.
5. New housing adjustment screws can be lightened with flat blade screwdriver, Philips screwdriver, Wrench or nut driver
6. Pre-installed captive bar hangers allow housing to be positioned at any point within a 24" joist span. Score lines provided for easy field shortening for 12" joists. Unique arrowhead design provides "Nainless" installation. Bar hangers can be repositioned 90° without tools. Hangers fit onto T-Bar spline for quick alignment and can be permanently secured with optional T-Bar clip.

Installation Features:

1. 7 1/2" Height allows use in 2"X8" joist construction.

listings: UL Damp Location UL Feed Through ETL Certified CETL Certified CUL Feed Through

RECESS 6" LINE VOLTAGE HOUSING SYSTEM



Features:

- A. Outer Housing: Aluminum Construction helps dissipate heat.
- B. Inner Housing: Can be adjusted in the plaster frame to compensate for different ceiling materials.
- C. Plaster Frame: Galvanized steel construction. The housing can be removed from the frame to access to the junction box. Frame includes locking screws for hanger bars and cutouts for crimping hanger bar in position.
- D. Junction Box: U.L. listed for through branch circuit wiring. Positioned to accommodate straight conduit runs. Seven conduit knockouts are uniform 1/2" size with true pryout slots. Four Romex pryouts with integral strain relief also included.
- E. Socket: Fixed position porcelain socket with nickel plated brass screw shell provides consistent lamp positioning.
- F. Thermal Protector: Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping.

Installation Features:

Pre-installed, captive bar hangers allow housing to be positioned at any point within a 24" joist span. Score lines provided for easy field shortening for 12" joist. Unique arrowhead design provides "nainless" installation. Bar hangers can be repositioned 90 Deg. Hangers fit onto T-bar spline for quick alignment.


listings:

UL listed for Damp Location, UL listed for Feed Through, UL listed for Direct Contact with Insulation and Combustible material. Meets State of California Title 24 Requirements. CSA Certified.

RECESS 6" LINE VOLTAGE HOUSING SYSTEM



DN-06S(DN-08)
Shallow New Construction
Non-IC Housing
Socket E27
Lamp:PAR30/PAR38 150W

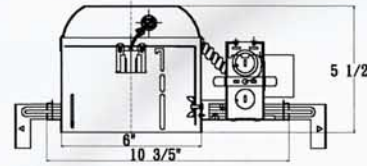

Description:

1. For use in ceilings where 2"X6" joist construction is used.
2. For non-insulated ceilings or where insulation can be kept 3" from housing (U.S. only)
3. For ceilings with 2"X6" joists Wiring and has (six) 1/2" Knockouts with true pryout slots.
Captive bar hangers span 24" joists and can be repositioned 90°. Adjustable socket bracket.

Housing Features:

1. Integral thermal protector Guards against misuse of Insulation materials and Improper lamping.
2. Adjustable socket bracket allows the use of different lamp types and sizes as well as assuring proper and consistent lamp positioning.
3. Junction box is listed for through branch circuit wiring and has seven 1/2" knockouts with true pry-out slots . Romex knock outs include built in strain relief and require no additional clamp.
4. Plaster frame includes locking Screw for hanger bars and Cutouts for crimping hanger Bars in position.
5. Pre-installed captive bar hangers allow housing to be positioned at any point within a 24" joist span. Score lines Provided for easy field shortening for 12" joist. Unique arrowhead design be repositioned 90° without tools. Hangers fit onto T-Bar spline for quick alignment and can be permanently secured with optional T-Bar clip.


Installation Features:

1. 5 1/2" Height allows use in 2"X6" joist construction.
2. Housing adjusts to accommodate ceilings up to 2" thick

listing:UL Damp Location UL Feed Through ETL Certified CETL Certified CUL Feed Through



DN-07S(DN-09)
Shallow Remodel
Non-IC Housing
Socket E27
Lamp:PAR30/PAR38 150W



Description:

1. Designed for quick and easy installation in new or existing ceilings where 2"X6" joist construction is used. For non-insulated ceilings or where insulation can be kept 3" from housing (U.S. only)

Housing Features:

1. Integral thermal protector guards against misuse of insulation materials and improper lamping.
2. Adjustable socket bracket allows the use of different lamp types and sizes as well as proper and consistent lamp positioning.
3. Junction box is listed for through branch circuit wiring and has seven 1/2" knockouts with true pry-out slots .
4. Four Romex pryouts with integral strain relief simplify Romex installation.

Installation Features:


1. 5 1/2" Height allows use in 2"X6" joist construction.
2. Unit slips through 6 1/4" ceiling opening.
3. Four remodel clips secure housing and accommodate various ceiling thickness.

listing:UL Damp Location UL Feed Through ETL Certified CETL Certified CUL Feed Through


RECESS 6" LINE VOLTAGE HOUSING SYSTEM



DN-07
Remodel Line Voltage
Non-IC Housing
Socket E27
Lamp:PAR30/R30
PAR38/R40 150W



DN-07 ICAT
Remodel Line Voltage
Air Tight IC Housing
Socket E27
Lamp:PAR30/R38 75W



Description:

- 1.For non-insulated ceilings or where insulation can be kept 3" from housing(U.S.only)
- 2.For remodeling installations where housing will be in direct contact with insulation. Integral thermal protector provides positive protection against overlampping.
- 3.DN-07ICAT meets State of Washington Restricted Air Flow requirements.

Housing Features:

- 1.Integral thermal protector Guards against misuse of insulation materials and improper lamping.
- 2.Adjustable socket bracket allows the use of different lamp types and sizes as well as proper and consistent lamp positioning.
- 3.Junction box is listed for through branch circuit wiring and has seven 1/2" knockouts with true pryout slots.
- 4.Four Romex pryouts with integral strain relief simplify Romex installation.

Installation Features:

- 1.7 1/2" Height allows use in 2"X8" joist construction.
- 2.Unit slips through 6 1/4" ceiling opening.
- 3.Four remodel clips secure housing and accommodate various ceiling thickness.

listings:UL Damp Location UL Feed Through ETL Certified CETL Certified
CUL Feed Through

RECESS TRIMS FOR 6" LINE VOLTAGE HOUSING



DNT 60 B
Black Baffle
White Ring
PAR30/R30




DNT 60 BG
Black Baffle
Gold Ring
PAR30/R30



DNT 60BC
Black Baffle
Chrome Ring
PAR30/R30



DNT 60 BS
Black Baffle
Satin Nickel Ring
PAR30/R30



DNT 60 W
White Baffle
White Ring
PAR30/R30




DNT 60 WG
White Baffle
Gold Ring
PAR30/R30



DNT 60 WC
White Baffle
Chrome Ring
PAR30/R30



DNT 60 WS
White Baffle
Satin Nickel Ring
PAR30/R30



DNT 61 B
Black Baffle
White Ring
PAR38/R40




DNT 61 BG
Black Baffle
Gold Ring
PAR38/R40



DNT 61 BC
Black Baffle
Chrome Ring
PAR38/R40



DNT 61 BS
Black Baffle
Satin Nickel Ring
PAR38/R40



DNT 61 W
White Baffle
White Ring
PAR38/R40



DNT 61 WG
White Baffle
Gold Ring
PAR38/R40



DNT 61 WC
White Baffle
Chrome Ring
PAR38/R40



DNT 61 WS
White Baffle
Satin Nickel Ring
PAR38/R40



RECESS LIGHT LINE VOLTAGE 6" UNIVERSAL

RECESS TRIMS FOR 6" LINE VOLTAGE HOUSING

RECESS LIGHT LINE VOLTAGE 6" UNIVERSAL



DNT 65 G
Gold Reflector
White Ring
PAR30/R30




DNT 65 GG
Gold Reflector
Gold Ring
PAR30/R30



DNT 65 GC
Gold Reflector
Chrome Ring
PAR30/R30



DNT 65 GS
Gold Reflector
Satin Nickel Ring
PAR30/R30



DNT 65 C
Chrom Reflector
White Ring
PAR30/R30



DNT 65 CG
Chrome Reflector
Gold Ring
PAR30/R30



DNT 65 CC
Chrome Reflector
Chrome Ring
PAR30/R30



DNT 65 CS
Chrome Reflector
Satin Nickel Ring
PAR30/R30



DNT 66 G
Gold Reflector
White Ring
PAR38/R40



DNT 66 GG
Gold Reflector
Gold Ring
PAR38/R40



DNT 66 GC
Gold Reflector
Chrome Ring
PAR38/R40



DNT 66 GS
Gold Reflector
Satin Nickel Ring
PAR38/R40



DNT 66 C
Chrome Reflector
White Ring
PAR38/R40



DNT 66 CG
Chrome Reflector
Gold Ring
PAR38/R40



DNT 66 CC
Chrome Reflector
Chrome Ring
PAR38/R40



DNT 66 CS
Chrome Reflector
Satin Nickel Ring
PAR38/R40

RECESS TRIMS FOR 6" LINE VOLTAGE HOUSING

RECESS LIGHT LINE VOLTAGE 6" UNIVERSAL



DNT615B



DNT615W



DNT 62 W
Open Trim
White
PAR30/R30




DNT 62 G
Open Trim
Gold
PAR30/R30



DNT 62 C
Open Trim
Chrome
PAR30/R30



DNT 62 SN
Open Trim
Satin Nickel
PAR30/R30



DNT 63 W
Open Trim
White
PAR38/R40




DNT 63 G
Open Trim
Gold
PAR38/R40



DNT 63 C
Open Trim
Chrome
PAR38/R40



DNT 63 SN
Open Trim
Satin Nickel
PAR38/R40




DNT 655 C
Aluminum Cone
Chrome Reflector
A19 PL Lamp



DNT 655 G
Aluminum Cone
Gold Reflector
A19 PL Lamp



DNT 658 CB
Regressed Baffle
Chrome Cone
A19 PL Lamp



DNT655C
Cone Reflector



DNT658CB
Reflector With Black Baffle



DNT658CW
Reflector With White Baffle

RECESS TRIMS FOR 6" LINE VOLTAGE HOUSING

RECESS LIGHT LINE VOLTAGE 6" UNIVERSAL

For Compact Fluorescent Bulb: R30PN18 and R40P20 R40P25

Incandescent Bule: R30, R40
Halogen Bule: PAR30, PAR38



For: R30 & PAR30



DNT641G/R
Open Gimbal
Gold
PAR30/R30



DNT641C/R
Open Gimbal
Chrome
PAR30/R30




DNT641SN/R
Open Gimbal
Satin Nickel
PAR30/R30



DNT641W/R
Open Gimbal
White
PAR30/R30



DNT641B/R
Open Gimbal
Black
PAR30/R30



For: R40 & PAR38



DNT642G/R
Open Gimbal
Gold
PAR38/R40



DNT642C/R
Open Gimbal
Chrome
PAR38/R40



DNT642SN/R
Open Gimbal
Satin Nickel
PAR38/R40




DNT642W/R
Open Gimbal
White
PAR38/R40




DNT642B/R
Open Gimbal
Black
PAR38/R40




RECESS TRIMS FOR 6" LINE VOLTAGE HOUSING



DNT67A
Albalite
White Trim



DNT67F
Fresnel
White Trim



DNT67D
Drop Opal
White Trim



DNT67AG
Albalite
Gold Trim



DNT67FG
Fresnel
Gold Trim



DNT67DG
Drop Opal
Gold Trim



DNT67AC
Albalite
Chrome Trim



DNT67FC
Fresnel
Chrome Trim



DNT67DC
Drop Opal
Chrome Trim



DNT67AS
Albalite
Satin Nickel Trim



DNT67FS
Fresnel
Satin Nickel Trim




DNT67DS
Drop Opal
Satin Nickel Trim


RECESS LIGHT LINE VOLTAGE 6" UNIVERSAL

RECESS TRIMS FOR 6" LINE VOLTAGE HOUSING


RECESS LIGHT LINE VOLTAGE 6" UNIVERSAL



DNT671A:Albalite
Black Baffle
White Ring



DNT671F:Fresnel
Black Baffle
White Ring



DNT671D:Drop Opal
Black Baffle
White Ring



DNT671AG:Albalite
Black Baffle
Gold Ring



DNT671FG:Fresnel
Black Baffle
Gold Ring



DNT671DG:Drop Opal
Black Baffle
Gold Ring



DNT671AC:Albalite
Black Baffle
Chrome Ring



DNT671FC:Fresnel
Black Baffle
Chrome Ring



DNT671DC:Drop Opal
Black Baffle
Chrome Ring



DNT671AS:Albalite
Black Baffle
Satin Nickel Ring




DNT671FS:Fresnel
Black Baffle
Satin Nickel Ring



DNT671DS:Drop Opal
Black Baffle
Satin Nickel Ring

RECESS TRIMS FOR 6" LINE VOLTAGE HOUSING

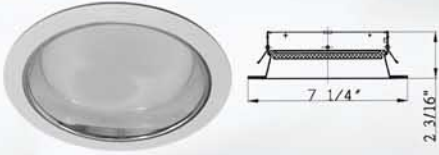

DNT675A:Albalite
Chrome Reflector
White Ring



DNT675F:Fresnel
Chrome Reflector
White Ring



DNT675D:Drop Opal
Chrome Reflector
White Ring



DNT675AG:Albalite
Chrome Reflector
Gold Ring



DNT675FG:Fresnel
Chrome Reflector
Gold Ring



DNT675DG:Drop Opal
Chrome Reflector
Gold Ring



DNT675AC:Albalite
Chrome Reflector
Chrome Ring



DNT675FC:Fresnel
Chrome Reflector
Chrome Ring



DNT675DC:Drop Opal
Chrome Reflector
Chrome Ring



DNT675AS:Albalite
Chrome Reflector
Satin Nickel Ring



DNT675FS:Fresnel
Chrome Reflector
Satin Nickel Ring



DNT675DS:Drop Opal
Chrome Reflector
Satin Nickel Ring

RECESS TRIMS FOR 6" LINE VOLTAGE HOUSING

RECESS LIGHT LINE VOLTAGE 6" UNIVERSAL




DNT 68 W
White Eyeball
PAR30/R30



DNT 68 G
Gold Eyeball
PAR30/R30



DNT 68 C
Chrome Eyeball
PAR30/R30



DNT 681W
White Regressed Eyeball
White Baffle
PAR30/R30




DNT 681GB
Gold Regressed Eyeball
Black Baffle
PAR30/R30



DNT 681GG
Gold Regressed Eyeball
Gold Reflector
PAR30/R30



DNT 681CC
Chrome Regressed Eyeball
Chrome Reflector
PAR30/R30



DNT69W
Wall Wash
White Ring