



DEEP ROOF LIGHTING INC.

P.O. BOX 520191, FLUSHING, NY 11352

Tel: 718-243-9388, 718-243-1185, 718-243-1188, 718-637-6061


Fax: 718-243-9403, 718-321-1676

[Web Site: www.deeprooflighting.com](http://www.deeprooflighting.com)

[Email: deeproof@aol.com](mailto:deeproof@aol.com) deeproof@verizon.net deeprooffg@gmail.com

DN-05 S-GU: 4" Line Voltage, Shallow Remodel, Non-IC.

**Lamp: GU10 Base MR16 LED 5,6,7 watts, Halogen 120V 50W MAX
Height: 4-1/2"**

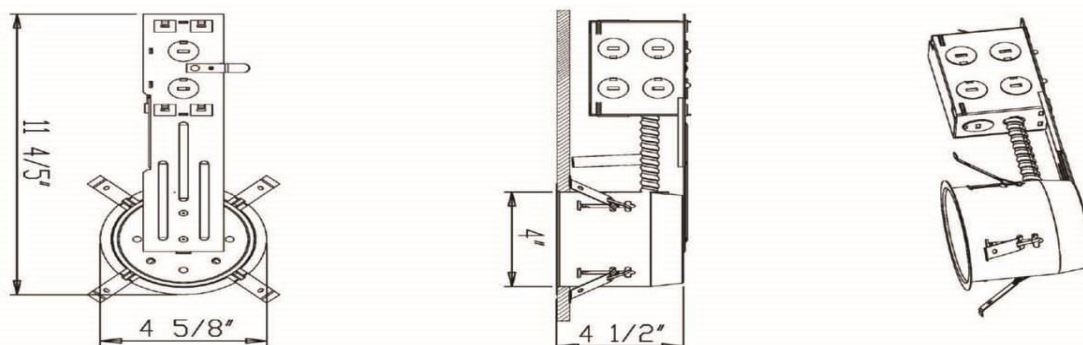

The DN-05S-GU is designed for use in non-insulated ceiling or for insulated ceiling but insulation must be kept 3" from all sides of the housing.

Junction Box

Listed for through branch circuit wiring.

Contains six 7/8" knockouts.

Remodel Clips

Three remodel clips secure housing and accommodates 1/2" and 5/8" ceiling materials.

Support Spring

Support Spring helps support weight of junction box and transformer. Automatically adjust for different ceiling materials.

Thermal Protector

Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.

Listings

UL ETL Listed damp location