

# T8 Open Strip




**4 feet**

## Product Features


- Heavy-duty 20-gauge steel utilized through out for durability body and code compliance.
- All welded assembly and post painted for maximum operating life.
- Pretreated with five-stage iron phosphate process ensures superior paint adhesion.
- Painted high-gloss baked white enamel.
- Shallow design ideal for commercial and industrial spaces requiring general illumination.
- Thermally protected, self re-setting, Class P, NPF, non-PCB and UL & CEE Listed ballast.
- Individual or continuous row mounting.
- Light weight design enables easier installation and increases worker productivity.

### 2 Lamps

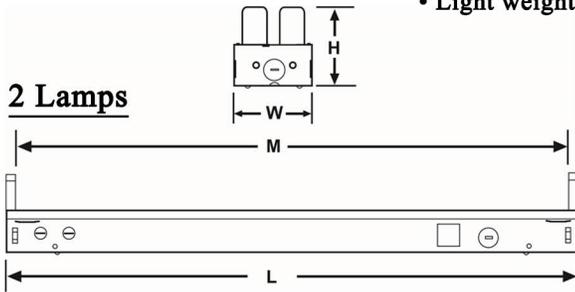


UNITS	M	L	W	H
INCHES	47 1/2"	48"	4"	3 1/4"
TOL (+/-)	0.05	0.05	0.05	0.05

### 3 Lamps

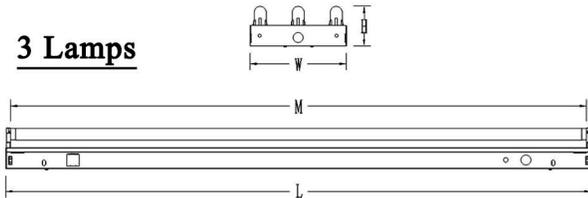

UNITS	M	L	W	H
INCHES	47 1/2"	48"	8"	3 1/4"
TOL (+/-)	0.05	0.05	0.05	0.05

### 4 Lamps

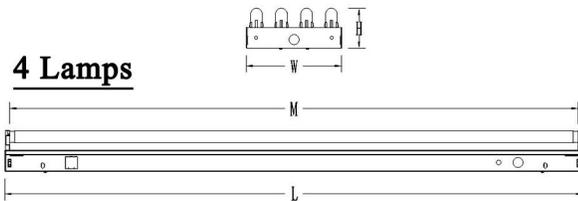

UNITS	M	L	W	H
INCHES	47 1/2"	48"	8"	3 1/4"
TOL (+/-)	0.05	0.05	0.05	0.05

## Item Codes

FOL42W	Open 4 feet, 2 lamps, For LED - No Ballast, White
FOL43W	Open 4 feet, 3 lamps, For LED - No Ballast, White
FOL44W	Open 4 feet, 4 lamps, For LED - No Ballast, White
FOF42W-HB	Open 4 feet, 2 lamps, For fluorescent T8, HPF ballast, White
FOF43W-HB	Open 4 feet, 3 lamps, For fluorescent T8, HPF ballast, White
FOF44W-HB	Open 4 feet, 4 lamps, For fluorescent T8, HPF ballast, White
FOF42W-NB	Open 4 feet, 2 lamps, For fluorescent T8, NPF ballast, White
FOF43W-NB	Open 4 feet, 3 lamps, For fluorescent T8, NPF ballast, White
FOF44W-NB	Open 4 feet, 4 lamps, For fluorescent T8, NPF ballast, White
FOF42W-D	Open 4 feet, 2 lamps, For fluorescent T8, Dimming HPF ballast, White
FOF43W-D	Open 4 feet, 3 lamps, For fluorescent T8, Dimming HPF ballast, White
FOF44W-D	Open 4 feet, 4 lamps, For fluorescent T8, Dimming HPF ballast, White

# Open Strip


## Product Features

- Heavy-duty 20-gauge steel utilized through out for durability body and code compliance.
- All welded assembly and post painted for maximum operating life.
- Pretreated with five-stage iron phosphate process ensures superior paint adhesion.
- Painted high-gloss baked white enamel.
- Shallow design ideal for commercial and industrial spaces requiring general illumination.
- Thermally protected, self re-setting, Class P, NPF, non-PCB and UL & CEE Listed ballast.
- Individual or continuous row mounting.
- Light weight design enables easier installation and increases worker productivity.




**8 feet**



**4 Lamps**

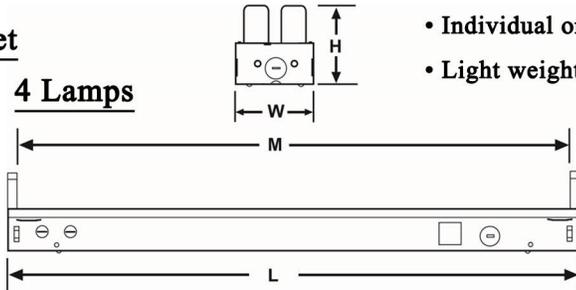

**6 Lamps**



**8 Lamps**

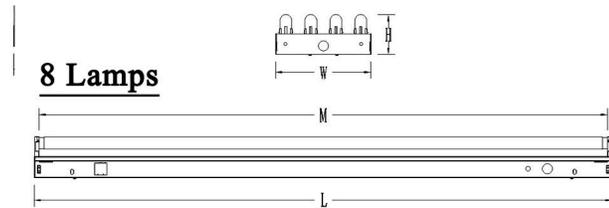

UNITS	M	L	W	H
INCHES	95 1/2"	96"	4"	3 1/4"
TOL (+/-)	0.05	0.05	0.05	0.05

UNITS	M	L	W	H
INCHES	95 1/2"	96"	8"	3 1/4"
TOL (+/-)	0.05	0.05	0.05	0.05

UNITS	M	L	W	H
INCHES	95 1/2"	96"	8"	3 1/4"
TOL (+/-)	0.05	0.05	0.05	0.05

## Item Codes

FOL84W	Open 8 feet, 4 lamps, For LED - No Ballast, White
FOL86W	Open 8 feet, 6 lamps, For LED - No Ballast, White
FOL88W	Open 8 feet, 8 lamps, For LED - No Ballast, White
FOL844W	Open 8 feet, 2 lamps, 4' tubes, For LED - No Ballast, White
FOL842W	Open 8 feet, 4 lamps, 4' tubes, For LED - No Ballast, White
FOL881W	Open 8 feet, 1 lamp, 8' tube, For LED - No Ballast, White
FOL882W	Open 8 feet, 2 lamp, 8' tube, For LED - No Ballast, White
FOL884W	Open 8 feet, 4 lamp, 8' tube, For LED - No Ballast, White
FOF84W-HB	Open 8 feet, 4 lamps, For fluorescent T8, HPF ballast, White
FOF86W-HB	Open 8 feet, 6 lamps, For fluorescent T8, HPF ballast, White
FOF88W-HB	Open 8 feet, 8 lamps, For fluorescent T8, HPF ballast, White
FOF84W-NB	Open 8 feet, 4 lamps, For fluorescent T8, NPF ballast, White
FOF86W-NB	Open 8 feet, 8 lamps, For fluorescent T8, NPF ballast, White
FOF88W-NB	Open 8 feet, 8 lamps, For fluorescent T8, NPF ballast, White
FOF84W-D	Open 8 feet, 4 lamps, For fluorescent T8, Dimming HPF ballast, White
FOF86W-D	Open 8 feet, 6 lamps, For fluorescent T8, Dimming HPF ballast, White
FOF88W-D	Open 8 feet, 8 lamps, For fluorescent T8, Dimming HPF ballast, White

# Industrial Strip




**4 feet**

## Product Features


- Heavy-duty 20-gauge steel utilized through out for durability body and code compliance.
- All welded assembly and post painted for maximum operating life.
- Pretreated with five-stage iron phosphate process ensures superior paint adhesion.
- Painted high-gloss baked white enamel.
- Shallow design ideal for commercial and industrial spaces requiring general illumination.
- Suitable for dry and damp environments.
- Thermally protected, self re-setting, Class P, NPF, non-PCB and UL & CEE Listed ballast.
- Suitable for surface mounting.
- Individual or continuous row mounting.
- Light weight design enables easier installation and increases worker productivity.

## 2 Lamps

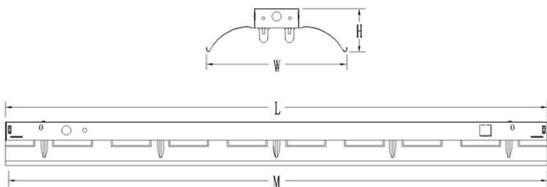


UNITS	M	L	W	H
INCHES	47 1/2"	48"	12"	4"
TOL (+/-)	0.05	0.05	0.05	0.05

## 3 Lamps

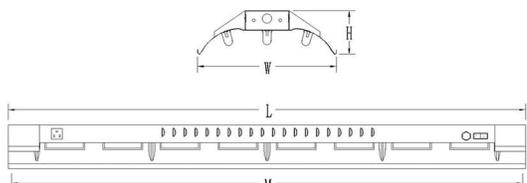

UNITS	M	L	W	H
INCHES	47 1/2"	48"	12"	4"
TOL (+/-)	0.05	0.05	0.05	0.05


## 4 Lamps

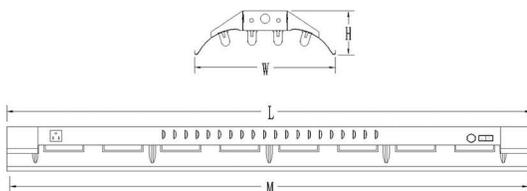

UNITS	M	L	W	H
INCHES	47 1/2"	48"	12"	4"
TOL (+/-)	0.05	0.05	0.05	0.05

## Item Codes


<b>FCL42W</b>	<b>Closure 4 feet, 2 lamps, For LED - No Ballast, White</b>
<b>FCL43W</b>	<b>Closure 4 feet, 3 lamps, For LED - No Ballast, White</b>
<b>FCL44W</b>	<b>Closure 4 feet, 4 lamps, For LED - No Ballast, White</b>
<b>FCF42W-HB</b>	<b>Closure 4 feet, 2 lamps, For fluorescent T8, HPF ballast, White</b>
<b>FCF43W-HB</b>	<b>Closure 4 feet, 3 lamps, For fluorescent T8, HPF ballast, White</b>
<b>FCF44W-HB</b>	<b>Closure 4 feet, 4 lamps, For fluorescent T8, HPF ballast, White</b>
<b>FCF42W-NB</b>	<b>Closure 4 feet, 2 lamps, For fluorescent T8, NPF ballast, White</b>
<b>FCF43W-NB</b>	<b>Closure 4 feet, 3 lamps, For fluorescent T8, NPF ballast, White</b>
<b>FCF44W-NB</b>	<b>Closure 4 feet, 4 lamps, For fluorescent T8, NPF ballast, White</b>
<b>FCF42W-D</b>	<b>Closure 4 feet, 2 lamps, For fluorescent T8, Dimming HPF ballast, White</b>
<b>FCF43W-D</b>	<b>Closure 4 feet, 3 lamps, For fluorescent T8, Dimming HPF ballast, White</b>
<b>FCF44W-D</b>	<b>Closure 4 feet, 4 lamps, For fluorescent T8, Dimming HPF ballast, White</b>

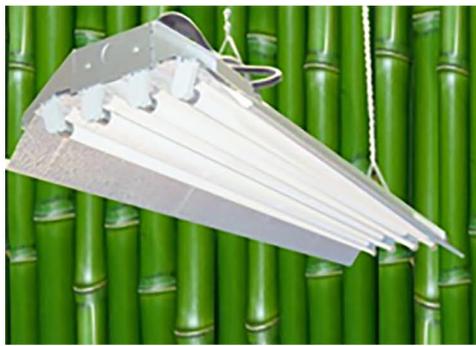

8 Feet


\* Pictures for reference only, We supply 8 feet fixtures on 4 foot lamps now, cascade 2 of 4 foot lamps

**4 Lamps**

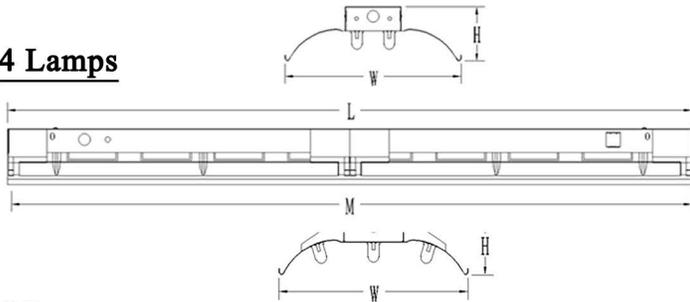


UNITS	M	L	W	H
INCHES	95 1/2"	96"	12"	4"
TOL (+/-)	0.05	0.05	0.05	0.05

**6 Lamps**

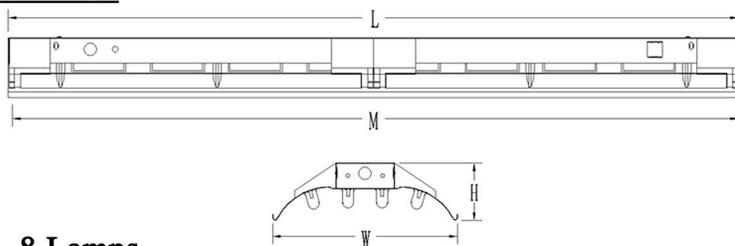

UNITS	M	L	W	H
INCHES	95 1/2"	96"	12"	4"
TOL (+/-)	0.05	0.05	0.05	0.05

**8 Lamps**

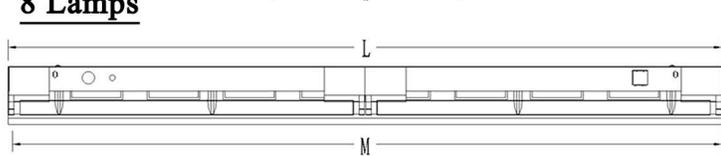

UNITS	M	L	W	H
INCHES	95 1/2"	96"	12"	4"
TOL (+/-)	0.05	0.05	0.05	0.05

**Item Codes**

FCL84W	Closure 8 feet, 4 lamps, For LED - No Ballast, White
FCL86W	Closure 8 feet, 6 lamps, For LED - No Ballast, White
FCL88W	Closure 8 feet, 6 lamps, For LED - No Ballast, White
FCF84W-HB	Closure 8 feet, 4 lamps, For fluorescent T8, HPF ballast, White
FCF86W-HB	Closure 8 feet, 6 lamps, For fluorescent T8, HPF ballast, White
FCF88W-HB	Closure 8 feet, 8 lamps, For fluorescent T8, HPF ballast, White
FCF84W-NB	Closure 8 feet, 4 lamps, For fluorescent T8, NPF ballast, White
FCF86W-NB	Closure 8 feet, 6 lamps, For fluorescent T8, NPF ballast, White
FCF88W-NB	Closure 8 feet, 4 lamps, For fluorescent T8, Dimming HPF ballast, White
FCF84W-D	Closure 8 feet, 4 lamps, For fluorescent T8, Dimming HPF ballast, White
FCF86W-D	Closure 8 feet, 6 lamps, For fluorescent T8, Dimming HPF ballast, White
FCF88W-D	Closure 8 feet, 8 lamps, For fluorescent T8, Dimming HPF ballast, White





# T8 Strip

## Product Features

- Heavy-duty 20-gauge steel utilized throughout for durability body and code compliance.
- All welded assembly and post painted for maximum operating life.
- Pretreated with five-stage iron phosphate process ensures superior paint adhesion.
- Painted high-gloss baked white enamel.
- Shallow design ideal for commercial and industrial spaces requiring general illumination.
- Suitable for dry and damp environments.
- Thermally protected, self re-setting, Class P, NPF, non-PCB and UL & CEE Listed ballast.
- Suitable for surface mounting.
- Light weight design enables easier installation and increases worker productivity.





### 2 Lamps



UNITS	M	L	W	H
INCHES	47 1/2"	48"	7"	2 1/2"
TOL (+/-)	0.05	0.05	0.05	0.05

### 4 Lamps



UNITS	M	L	W	H
INCHES	47 1/2"	48"	11"	2 1/2"
TOL (+/-)	0.05	0.05	0.05	0.05

### Item Codes

<b>FRL41W</b>	<b>4 feet, 1 lamp, 4' tube, For LED - No Ballast, White</b>
<b>FRL42W</b>	<b>4 feet, 2 lamps, 4' tubes, For LED - No Ballast, White</b>
<b>FRL44W</b>	<b>4 feet, 4 lamps, 4' tubes, For LED - No Ballast, White</b>
<b>FRL82W</b>	<b>8 feet, 2 lamps, 8' tubes, For LED - No Ballast, White</b>
<b>FRL844W</b>	<b>8 feet, 4 lamps, 4' tubes, For LED - No Ballast, White</b>
<b>FRL882W</b>	<b>8 feet, 2 lamps, 8' tubes, For LED - No Ballast, White</b>
<b>FRL884W</b>	<b>8 feet, 4 lamps, 8' tubes, For LED - No Ballast, White</b>
<b>FRF42W-HB</b>	<b>4 feet, 2 lamps, For fluorescent, HPF ballast, White</b>
<b>FRF44W-HB</b>	<b>4 feet, 4 lamps, For fluorescent, HPF ballast, White</b>
<b>FRF42W-NB</b>	<b>4 feet, 2 lamps, For fluorescent, NPF ballast, White</b>
<b>FRF44W-NB</b>	<b>4 feet, 4 lamps, For fluorescent, NPF ballast, White</b>
<b>FRF42W-D</b>	<b>4 feet, 2 lamps, For fluorescent, Dimmable HPF ballast, White</b>
<b>FRF44W-D</b>	<b>4 feet, 4 lamps, For fluorescent, Dimmable HPF ballast, White</b>