


6" COMPACT FLUORESCENT, NON DIMMING AND DIMMABLE


DP601N-1HU : Non Dimming

Non-IC, NEW CONSTRUCTION, VERTICAL
Lamps : 1x26, 1x32, 1x42 watts CFL
Ballast : Advance HPF, 120-277 Intellivolt

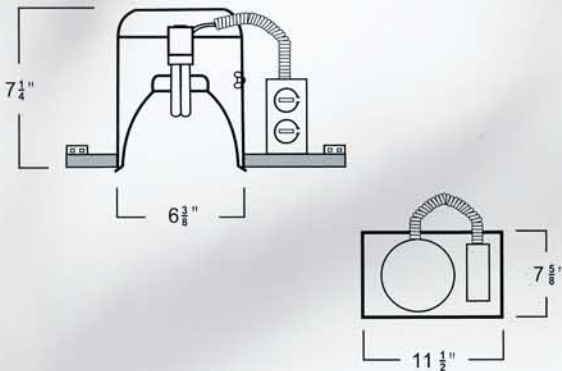

DD601N-1HU : Dimmable

Non-IC, NEW CONSTRUCTION, VERTICAL
Lamps : 1x26, 1x32, 1x42 watts CFL
Ballast : Deep Roof 98/99 % HPF, 100 - 277 VAC input
1 - 100 % dimmable, 0 - 10 VDC interface

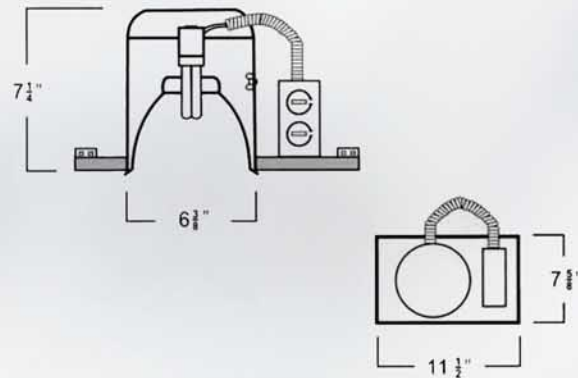

Housing Features

- For Non-Insulated ceiling or 3" space between Housing and Insulation
- Thermally Protected
- Wire Through Junction Box
- Four Romex pry-outs with strain relief
- Adjustable Hanger Bar with 16" to 24" joist span
- 7 1/2" height allows use in 2" x8" joist construction
- Housing adjusts to accommodate up to 2" thick ceilings

Listings

- UL Damp Location, Feed Through
- CSA Certified

Housing Features

- For Non-Insulated ceiling or 3" space between Housing and Insulation
- Thermally Protected
- Wire Through Junction Box
- Four Romex pry-outs with strain relief
- Adjustable Hanger Bar with 16" to 24" joist span
- 7 1/2" height allows use in 2" x8" joist construction
- Housing adjusts to accommodate up to 2" thick ceilings

Listings

- UL Damp Location, Feed Through
- CSA Certified

6" COMPACT FLUORESCENT, NON DIMMING AND DIMMABLE


6" COMPACT FLUORESCENT, NON DIMMING AND DIMMABLE

DP601R-1HU : Non Dimming

Non-IC, REMODEL, VERTICAL

Lamps: 1X26, 1X32, 1X42 Watt CFL

Ballast: Advance HPF, 120-277 Intellivolt

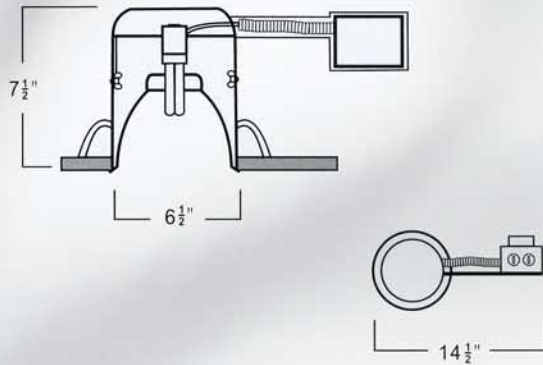


DD601N-1HU : Dimmable

Non-IC, REMODEL, VERTICAL

Lamps: 1X26, 1X32, 1X42 Watt CFL

Ballast: Deep Roof 98/99% HPF, 100-277 VAC input
1-100% dimmable, 0-10 VDC interface

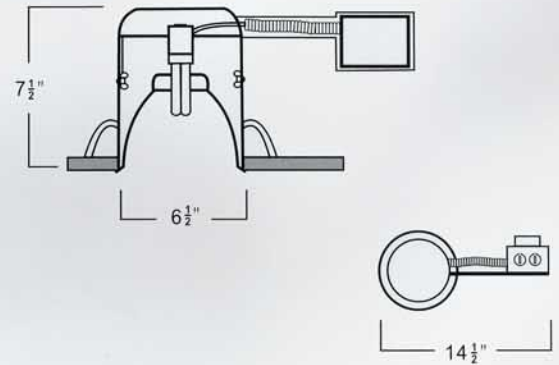

Housing Features

- For Non-Insulated ceiling or 3" space between Housing and Insulation
- Thermally Protected
- Wire Through Junction Box
- Four Romex pry-outs with strain relief
- Unit slips through 6 1/2" ceiling opening
- Four Remodeling clips secure housing and accommodate various ceiling thickness

Listings

- UL Damp Location, Feed Through
- CSA Certified

Housing Features

- For Non-Insulated ceiling or 3" space between Housing and Insulation
- Thermally Protected
- Wire Through Junction Box
- Four Romex pry-outs with strain relief
- Unit slips through 6 1/2" ceiling opening
- Four Remodeling clips secure housing and accommodate various ceiling thickness

Listings

- UL Damp Location, Feed Through
- CSA Certified

6" COMPACT FLUORESCENT, NON DIMMING AND DIMMABLE


DP601IC(AT)-1HU : Non Dimming DD601IC(AT)-1HU : Dimmable

IC(AIR TIGHT), NEW CONSTRUCTION, VERTICAL

Lamps: 1x26 Watt CFL

Ballast: Advance HPF, 120-277 Intellivolt

Dimming Ballast: Deep Roof 98/99% HPF, 100-277 VAC input
1-100% Dimmable, 0-10 VDC interface

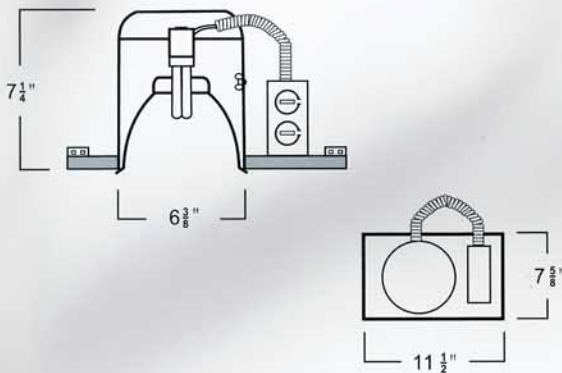

Housing Features

- For direct contact with thermal insulation
- Thermally Protected
- Wire Through Junction Box
- Four Romex pry-outs with strain relief
- Adjustable Hanger Bar up 24" and can be repositioned 90 for easy installation
- Housing adjusts to accommodate up to 2" thick ceilings
- Insulation Contact

Listings

- UL Damp Location, Feed Through
- CSA Certified
- WSEC for Air Tight


DP601ICR(AT)-1HU : Non Dimming DD601ICR(AT)-1HU : Dimmable

IC(AIR TIGHT), REMODEL, VERTICAL

Lamps: 1x26 Watt CFL

Ballast: Advance HPF, 120-277 Intellivolt

Dimming Ballast: Deep Roof 98/99% HPF, 100-277 VAC input
1-100% Dimmable, 0-10 VDC interface

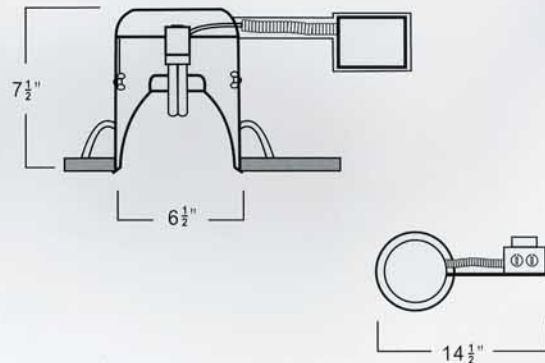

Housing Features

- For direct contact with thermal insulation
- Thermally Protected
- Wire Through Junction Box
- Four Romex pry-outs with strain relief
- Unit slips through 6 1/2" ceiling opening
- Four Remodeling clips secure housing and accommodate various ceiling thickness
- Insulation Contact

Listings


- UL Damp Location, Feed Through
- CSA Certified
- WSEC for Air Tight

6" COMPACT FLUORESCENT, NON DIMMING AND DIMMABLE

6" COMPACT FLUORESCENT, NON DIMMING AND DIMMABLE

DP601IC-DW-1HU : Non Dimming

IC, DOUBLE WALL NEW CONSTRUCTION, VERTICAL
Lamps: 1X26, 1X32, 1X42 Watt CFL
Ballast: Advance HPF, 120-277 Intellivolt

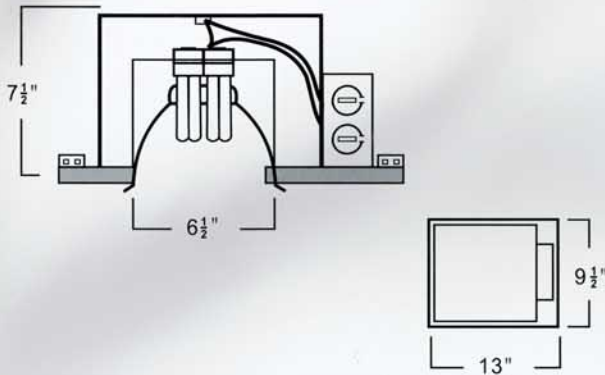

Housing Features


- For direct contact with thermal insulation
- Thermally Protected
- Wire Through Junction Box
- Four Romex pry-outs with strain relief
- Adjustable Hanger Bar with 16" to 24" joist span
- 7 1/2" height allows use in 2"x8" joist construction
- Housing adjusts to accommodate up to 2" thick ceilings

Listings

- UL Damp Location, Feed Through
- CSA Certified
- WSEC for Air Tight

DD601IC-DW-1HU : Dimmable

IC (AIR TIGHT), NEW CONSTRUCTION, VERTICAL
DOUBLE WALL
Lamps: 1X26, 1X32, 1X42 Watt CFL
Ballast: Deep Roof 98/99% HPF, 100-277 VAC input
1-100% dimmable, 0-10 VDC interface

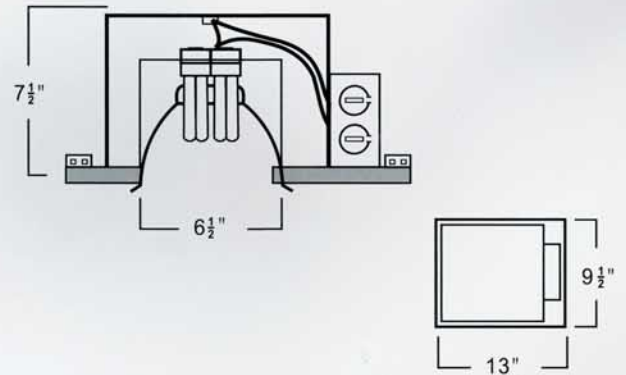

Housing Features

- For direct contact with thermal insulation
- Thermally Protected
- Wire Through Junction Box
- Four Romex pry-outs with strain relief
- Adjustable Hanger Bar with 16" to 24" joist span
- 7 1/2" height allows use in 2"x8" joist construction
- Housing adjusts to accommodate up to 2" thick ceilings

Listings

- UL Damp Location, Feed Through
- CSA Certified
- WSEC for Air Tight

6" COMPACT FLUORESCENT, NON DIMMING AND DIMMABLE



DPT615B
Black Cone Baffle



DPT615W
White Cone Baffle




DPT655C
Aluminum Cone
Chrome Reflector
PLC Lamps



DPT655G
Aluminum Cone
Gold Reflector
PLC Lamps



DPT655C
Cone Reflector




DPT658CB
Regressed Baffle
Chrome Cone Reflector
PLC Lamps



DPT658CB
Reflector with Black Baffle




DPT658CW
Reflector with White Baffle



6" COMPACT FLUORESCENT, NON DIMMING AND DIMMABLE


6" COMPACT FLUORESCENT, NON DIMMING AND DIMMABLE

6" COMPACT FLUORESCENT, NON DIMMING AND DIMMABLE




DPT67A

Albalite
White Trim
Cone Reflector



DPT67F

Fresnel
White Trim
Cone Reflector



DPT67D

Drop Opal
White Trim
Cone Reflector



DPT67AG

Albalite
Gold Trim
Cone Reflector



DPT67F

Fresnel
Gold Trim
Cone Reflector



DPT67D

Drop Opal
Gold Trim
Cone Reflector



DPT67AC

Albalite
Chrome Trim
Cone Reflector



DPT67FC

Fresnel
Chrome Trim
Cone Reflector



DPT67DC

Drop Opal
Chrome Trim
Cone Reflector



DPT67AS

Albalite
Satin Nickel Trim
Cone Reflector



DPT67FS


Fresnel
Satin Nickel Trim
Cone Reflector



DPT67DS


Drop Opal
Satin Nickel Trim
Cone Reflector

6" COMPACT FLUORESCENT, NON DIMMING AND DIMMABLE



DPT671D

Drop Opal
Black Baffle
White Ring
Cone Reflector



DPT675D

Drop Opal
Chrome Reflector
White Ring
Cone Reflector



DPT67DG

Drop Opal
Black Baffle
Gold Ring
Cone Reflector



DPT675DG

Drop Opal
Chrome Reflector
Gold Ring
Cone Reflector



DPT671DC

Drop Opal
Black Baffle
Chrome Ring
Cone Reflector



DPT675DC

Drop Opal
Chrome Reflector
Chrome Ring
Cone Reflector



DPT671DS

Drop Opal
Black Baffle
Satin Nickel Ring
Cone Reflector



DPT675DS

Drop Opal
Chrome Reflector
Satin Nickel Ring
Cone Reflector

6" COMPACT FLUORESCENT, NON DIMMING AND DIMMABLE