


New Accessories for LED tape strip ribbon




LSA-IJ-2: Open veil connector

- I Joiner, single color strip
- 2 lines, 8 mm, interior strips



LSA-LJ-2: Open veil connector

- L Joiner 90°, single color strip
- 2 lines, 8 mm, interior strips
- Use LSA-IJ-2 for each strip

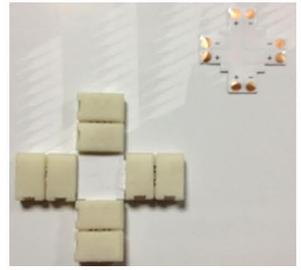


LSA-XJ-2: Open veil connector

- X Joiner 90°, 180°, 270° 4 ways
- Single color strip
- 2 lines, 8 mm, interior strips
- Use LSA-IJ-2 for each strip



LSA-TJ-2 : Open veil connector

- T Joiner 90° & 180° 3 ways
- Single color strip
- 2 lines, 8 mm, interior strips
- Use LSA-IJ-2 for each strip

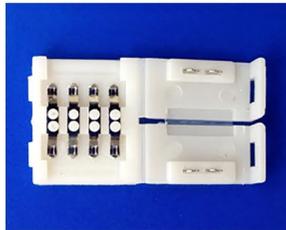

LSR-IJ-4 : Open veil connector


- I Joiner, Standard RGB color strip
- 4 lines, 10 mm, interior standard RGB strip



LSA-OV-OV-15L : open veil to open veil


- Open veils link 15 cm
- 2 lines, 8 mm, interior strips
- Bottom 2 pins converter reserved for future)

New Accessories for LED tape strip ribbon

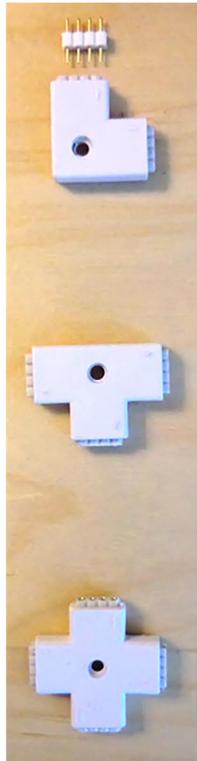

LSRW-LJ-4 : Easy 4 pins connector

- L Joiner 90°, Standard RGB color strip
- 4 lines, 10 mm, interior & waterproof strips
- Waterproof connector

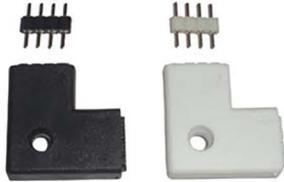

LSRW-TJ-4 : Easy 4 pins connector

- T Joiner 90° 180° 3 ways, Standard RGB strip
- 4 lines, 10 mm, interior & waterproof strips
- Waterproof connector



LSRW-XJ-4 : Easy 4 pins connector


- X Joiner 90° 180° 270° 4 ways, Standard RGB strip
- 4 lines, 10 mm, interior & waterproof RGB strips
- Waterproof connector



LSRW-FW-4P-15L

Free wires to 4 pins line converter

- Free wires and 4 pins module convertor, 15 cm length
- 4 lines, 10 mm, interior & waterproof standard RGB

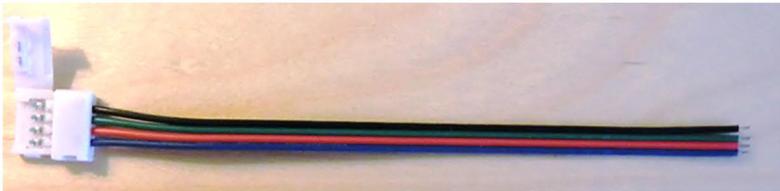

LSRW-FW-OV-15L

Free wires to open veil line converter

- Free wires and open veil convertor, 15 cm length
- 4 lines, 10 mm, interior standard RGB strips

New Accessories for LED tape strip ribbon



LSRW-FW-2C-15L : Waterproof coupling 2 sections in free wires

- Waterproof connect two RGB sections on free wires, 15 cm length each
- 4 lines, 10 mm, standard RGB interior & waterproof strips



Multiple IR controllers for 1 single power supply

LSR-LSRR-PS-2CTL 1 power supply to 2 IR controller

LSR-LSRR-PS-3CTL 1 power supply to 3 IR controller

LSR-LSRR-PS-4CTL 1 power supply to 4 IR controller

* For LSR or LSRR low voltage IR controllers , RF controller using free wires.



LSRR-FW-10P-15L : LSRR free wires to 10 pins module line convertor

- LSRR strips convertor of free wires to 10 pins module, 15 cm length.



LSR-CT302-RF : RGB RF remote controller

- Standard RGB strip RF controller
- Input : 12/24 VDC • Load : 3 X 6A
- Max : 216 W/12V, 432 W/24V
- Controller - L167 X W52 X H24 mm
- Remote - L113.5 X W55 X H21 mm
- Env. Temperature : -35° / +55° C
- Remote Distance : 20 meters
- Protection : Short circuit
- Over current, Over temperature