


RECESS SYSTEM 4" LINE VOLTAGE HOUSING



DN-04
New Construction Line Voltage
Non IC Housing
Socket:E27
Lamp:PAR20/R20

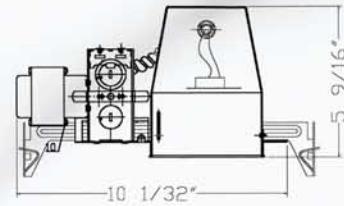

Description:Small aperture housing for providing accent and task lighting.

Housing Features:

- 1.Integral thermal protector guards against misuse of insulation material and improper lamping.
- 2.Junction Box is listed for through branch circuit wiring and has seven 1/2" knockouts and four Romex knockouts with true pryout slots. Romex knockouts include built in strain relief and require no additional clamps.


Installation Features:

- 1.Housing can be removed from plaster frame for junction box access.
- 2.Pre-installed, captive bar hangers allow housing to be positioned at any point within a 24" joist span. Score lines provided for easy field shortening for 12" joists.
- 3.Unique arrowhead design provides "Nainless" installation. Bar hangers can be repositioned 90° without tools. Hangers fit onto T-Bar spline for quick alignment and can be permanently secured with optional T-Bar clip.

listings:UL Damp Location UL Feed Through CSA Certified IP Rated



DN-05
Remodel Line Voltage
Non IC Housing
Socket:E27
Lamp:PAR20/R20

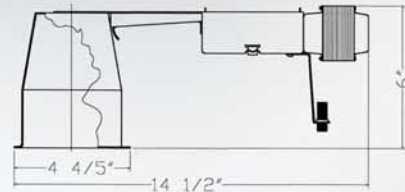

Description:Small aperture remodel housing for accent and task lighting.

Housing Features:

- 1.Integral thermal protector guards against misuse of insulation materials and improper lamping.
- 2.Junction box is listed for through branch circuit wiring and has seven 1/2" knockouts with true pry-out slots.
- 3.Four Romex pryouts with integral traps simplify Romex installation.

Installation Features:


- 1.5 1/2" Height allows use in 2"X6" joist construction.
- 2.Unit slips through 4 1/4" ceiling opening.
- 3.Four remodel clips secure housing and accommodate various ceiling thickness.

listings:UL Damp Location UL Feed Through ETL Certified CETL Certified CUL Feed Through

RECESS SYSTEM 4" LINE VOLTAGE HOUSING



DN-04 ICAT
New Construction Line Voltage
Air Tight IC Housing
Socket:E27
Lamp:PAR20/R20

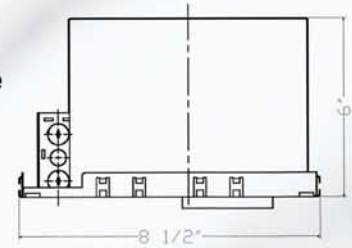

Description:

- 1.Small aperture housing for providing accent and task lighting where housing will be in direct contact with ceiling insulation.
- 2.The AIR-TIGHT construction limits air exchange between the ceiling plenum and heated or air conditioned areas.

Housing Features:

- 1.DN-04ICAT is an AIR-TIGHT fixture sealed and gasketed to prevent airflow between plenum spaces and heated areas.
- 2.Integral thermal protector guards against misuse of insulation materials and improper lamping.
- 3.Double wall housing construction.
- 4.Junction box is listed for through branch circuit wiring and has seven 1/2" knockouts and four Romex knockouts with true pryout slots. Romex knockouts include built in strain relief and require no additional clamps.
- 5.Captive bar hangers span 24" joists and allow housing to be positioned at any point of fully extended hanger bars. Score lines provided for easy field shortening for 12' joists. Unique arrowhead design provides "Nailless" installation.

Installation Features:

- 1.5 1/8" Height allows use in 2"X6" joist construction.
- 2.Housing can be removed from plaster frame for junction box access.

listings:UL Damp Location UL Feed Through CUL Certified CETL Certified

CUL FEED Through Meets State of Washington Restricted Air Flow Requirements

RECESS TRIMS FOR 4" LINE VOLTAGE HOUSING

RECESS LIGHT LINE VOLTAGE 4"



DNT 40 B
Black Baffle
White Ring
PAR20/R20




DNT 40 BG
Black Baffle
Gold Ring
PAR20/R20



DNT 40 BC
Black Baffle
Chrome Ring
PAR20/R20



DNT 40 BS
Black Baffle
Satin Nickel Ring
PAR20/R20



DNT 40 W
White Baffle
White Ring
PAR20/R20



DNT 40 WG
White Baffle
Gold Ring
PAR20/R20



DNT 40 WC
White Baffle
Chrome Ring
PAR20/R20



DNT 40 WS
White Baffle
Satin Nickel Ring
PAR20/R20



DNT 45 C
Chrome Reflector
White Ring
PAR20/R20



DNT 45 CG
Chrome Reflector
Gold Ring
PAR20/R20



DNT 45 CC
Chrome Reflector
Chrome Ring
PAR20/R20



DNT 45 CS
Chrome Reflector
Satin Nickel Ring
PAR20/R20



DNT 45 G
Gold Reflector
White Ring
PAR20/R20




DNT 45 GG
Gold Reflector
Gold Ring
PAR20/R20



DNT 45 GC
Gold Reflector
Chrome Ring
PAR20/R20




DNT 45 GS
Gold Reflector
Satin Nickel Ring
PAR20/R20




DNT 43 W
Slot Aperture
White
PAR20/R20



DNT 47 WB
White Pin Hole
Black Baffle
PAR20/R20



DNT 47 WC
White Pin Hole
Chrome Reflector
PAR20/R20





RECESS TRIMS FOR 4" LINE VOLTAGE HOUSING

RECESS LIGHT LINE VOLTAGE 4"

4 " Line Voltage Square Trims

For DN-04, DN-05, DN04-IC and DN04-ICAT housings
Lamps - PAR20 and R20
With Alzac chrome reflector

DNT-424SN -- Brush Nickel DNT-424W -- White

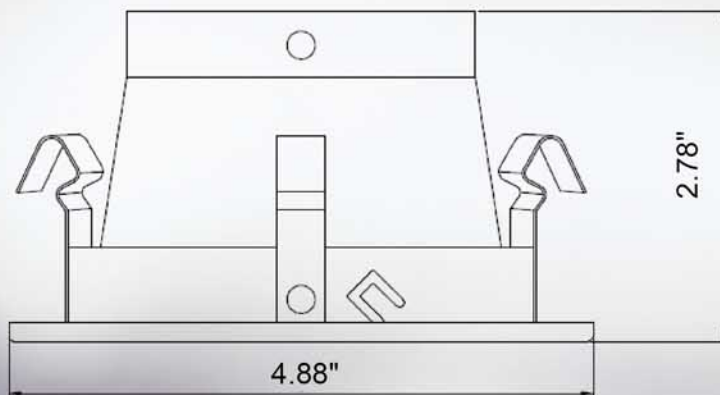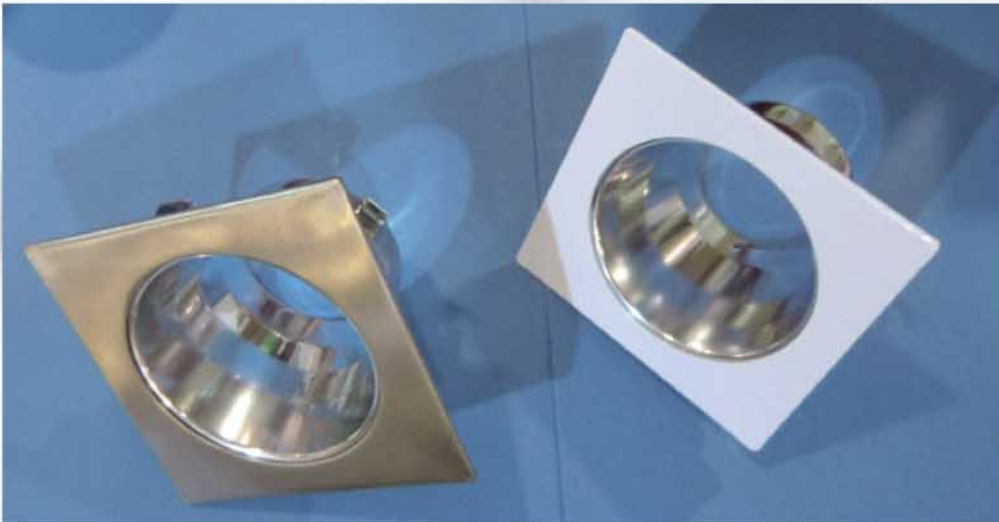

RECESS TRIMS FOR 4" LINE VOLTAGE HOUSING



DNT46W/R
DNT 46 W
Gimbal Ring
White
PAR20/R20



DNT46B/R
DNT 46 B
Gimbal Ring
Black
PAR20/R20




DNT46G/R
DNT 46 G
Gimbal Ring
Gold
PAR20/R20



DNT46C/R
DNT 46 C
Gimbal Ring
Chrome
PAR20/R20



DNT46SN/R
DNT 46 SN
Gimbal Ring
Satin Nickel
PAR20/R20




DNT 48 W
Eyeball
White
PAR20/R20



DNT 48 G
Eyeball
Gold
PAR20/R20




DNT 48 C
Eyeball
Chrome
PAR20/R20



DNT 41 F
Flat Drop Glass
Frost White
PAR20/R20



DNT 41 BU
Flat Drop Glass
Frost Blue
PAR20/R20




DNT 42 F
Step Glass
Frost White
PAR20/R20



DNT 42 BU
Step Glass
Frost Blue
PAR20/R20




DNT 42 P
Step Glass
Frost Pink
PAR20/R20



DNT 49 WW
White Wall Washer
White Ring
PAR20/R20



DNT 49 WB
Black Wall Washer
White Ring
PAR20/R20



RECESS LIGHT LINE VOLTAGE 4"

4" Housing System: Shower Trims

4" Housing System: Shower Trims

Using Compact Fluorescent and regular A type Bulb

PSM11
11W mini-screw



P4US15
15W,4U



Albalite with Reflector



Fresnel with Reflector



Drop Opal with Reflector



If Using Reflector R & PAR Bulb
Take reference to our recess lighting book.



DNT44A
DNT44A/C

Albalite Shower
PAR20/R20
White



DNT44AG
DNT44AG/C

Albalite Shower
PAR20/R20
Gold




DNT44AC
DNT44AC/C

Albalite Shower
PAR20/R20
Chrome



DNT44AS
DNT44AS/C

Albalite Shower
PAR20/R20
Satin Nickle



DNT44F
DNT44F/C

Fresnel Shower
PAR20/R20
White



DNT44FG
DNT44FG/C

Fresnel Shower
PAR20/R20
Gold




DNT44FC
DNT44FC/C

Fresnel Shower
PAR20/R20
Chrome



DNT44FS
DNT44FS/C

Fresnel Shower
PAR20/R20
Satin Nickle



DNT44D
DNT44D/C

Drop Opal Shower
PAR20/R20
White



DNT44DG
DNT44DG/C

Drop Opal Shower
PAR20/R20
Gold




DNT44DC
DNT44DC/C

Drop Opal Shower
PAR20/R20
Chrome



DNT44DS
DNT44DS/C

Drop Opal Shower
PAR20/R20
Satin Nickle




4" Housing System: Gimble Ring Trims

For Compact Fluorescent Reflector Bulb

R20 P11(11W)

Incandescent R20, Halogen PAR20 Bulbs.

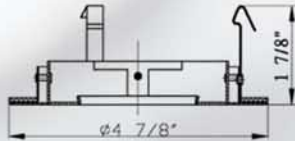

DNT46G/R
Gimbal Ring
Gold
PAR20/R20



DNT46C/R
Gimbal Ring
Chrome
PAR20/R20



DNT46SN/R
Gimbal Ring
Satin Nickel
PAR20/R20



DNT46W/R
Gimbal Ring
White
PAR20/R20



DNT46B/R
Gimbal Ring
Black
PAR20/R20