

# 6" COMPACT FLUORESCENT, NON DIMMING AND DIMMABLE

6" COMPACT FLUORESCENT, NON DIMMING AND DIMMABLE



## DP626N-2HU : Non Dimming DD626N-2HU : Dimmable

NON-IC, NEW CONSTRUCTION, HORIZONTAL

Lamps: 2x26 Watt CFL

Ballast: Advance HPF, 120-277 Intellivolt

Dimming Ballast: Deep Roof 98/99% HPF, 100-277 VAC input  
1-100% Dimmable, 0-10 VDC interface

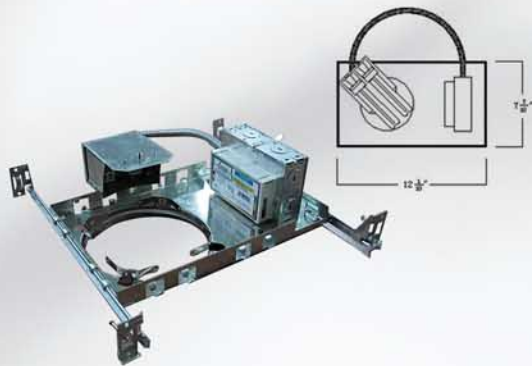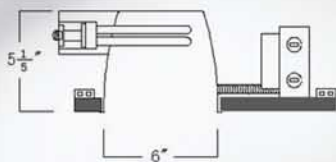

### Housing Features

- For Non-Insulated ceiling or 3" space between Housing and Insulation
- Thermally Protected
- Wire Through Junction Box
- Four Romex pry-outs with strain relief
- Adjustable Hanger Bar with 16" to 24" joist span
- Housing adjusts to accommodate up to 2" thick ceilings

### Listings



- UL Damp Location, Feed Through
- CSA Certified

## DP618N-2HU : Non Dimming DD618N-2HU : Dimmable

NON-IC, NEW CONSTRUCTION, HORIZONTAL

Lamps: 2x18 Watt CFL

Ballast: Advance HPF, 120-277 Intellivolt

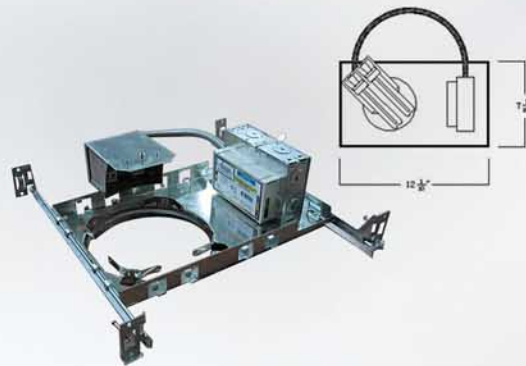

### Housing Features

- For Non-Insulated ceiling or 3" space between Housing and Insulation
- Thermally Protected
- Wire Through Junction Box
- Four Romex pry-outs with strain relief
- Adjustable Hanger Bar with 16" to 24" joist span
- Housing adjusts to accommodate up to 2" thick ceilings

### Listings

- UL Damp Location, Feed Through
- CSA Certified

# 6" COMPACT FLUORESCENT, NON DIMMING AND DIMMABLE



**DPT65G-H**

Gold Reflector



**DPT658CW-H**

Chrome Reflector  
White Baffle



**DPT658CB-H**

Chrome Reflector  
Black Baffle



**DPT65C-H**

Chrome Reflector



**DPT659X-H**

Chrome Reflector  
Cross Louver

6" COMPACT FLUORESCENT, NON DIMMING AND DIMMABLE